


RATIO : 5、7 (單段 1-Stage)

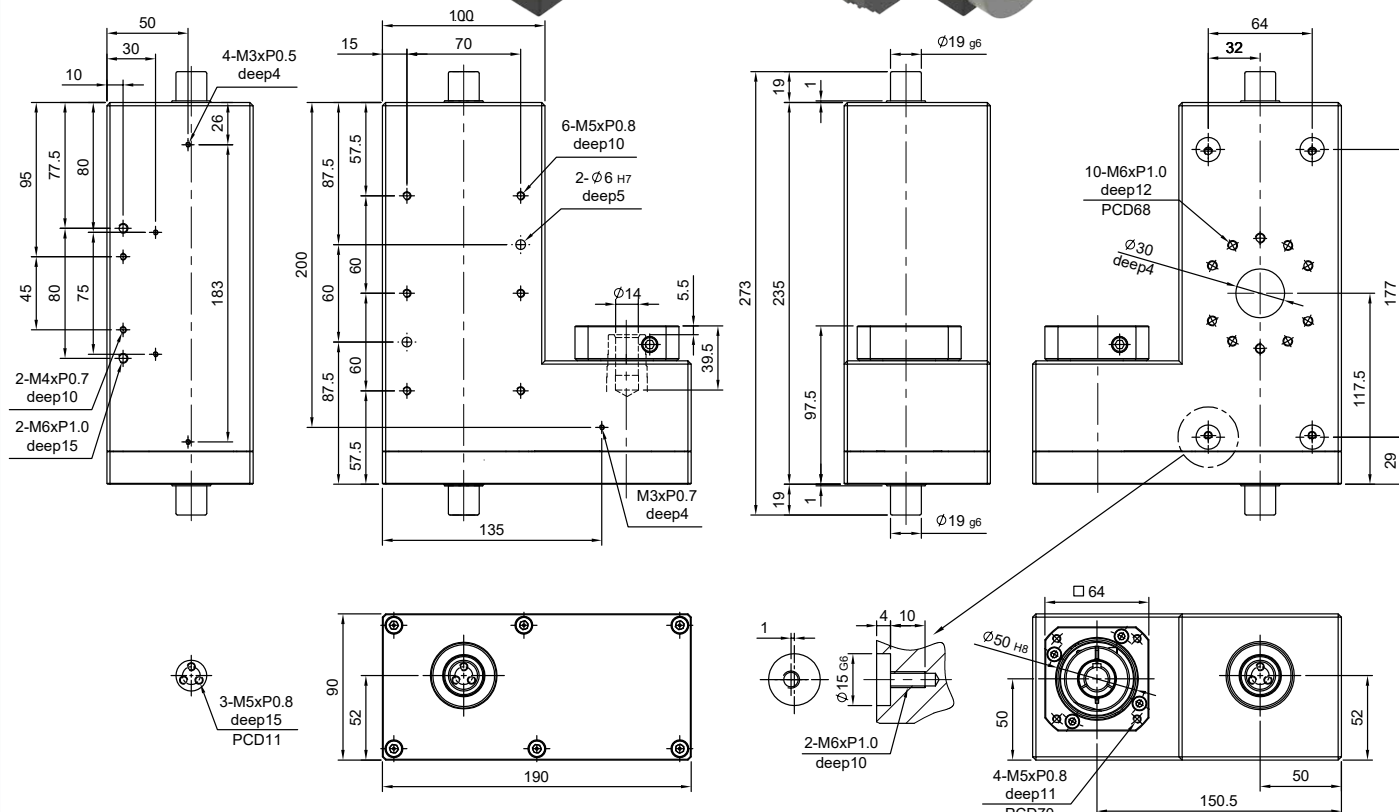

減速比 Ratio	代號	單位 Unit	5	7
額定輸出扭矩 / Rated Output Torque (Nominal Output Torque)	T_{2N}	Nm	30	
最大加速扭矩 / Max. Acceleration Torque	T_{2B}	Nm	1.8 倍額定輸出力矩 1.8 Times of Rated Output Torque	
最大輸出扭矩 / Max. Output Torque 急停扭矩 / Emergency Stop Torque	T_{2NOT}	Nm	3 倍額定輸出力矩 3 Times of Rated Output Torque	
額定輸入轉速 / Rated Input Speed	n_{IN}	rpm	3,000	
最大輸入轉速 / Max. Input Speed	n_{IB}	rpm	6,000	
背隙 / Backlash		arcmin	≤ 15	
容許徑向力 / Max. Radial Force	F_{2rB}	N	3,200	
容許軸向力 / Max. Axial Force	F_{2aB}	N	1,600	
使用壽命 / Service Life	L_H	hr	S5 周期運轉 : >30,000 (S1 連續運轉 : >15,000 hrs) S5 Cycle Operation: >30,000 (S1 Continuous Operation: >15,000)	
效率 / Efficiency	η	%	≥ 98	
使用溫度 / Operating Temperature		°C	-20°C ~ +90°C	
潤滑 / Lubrication			全合成潤滑油脂 Synthetic Grease	
防護等級 / Protection Class			IP65	
安裝方向 / Mounting Position			任意方向 Any	
噪音值 / Noise Level		dB	≤ 65	
重量 / Weight $\pm 2\%$		Kg	7.5	7.5