


■ 同心軸載齒減速機

Hypoid Gear Reducer(Concentric Shaft)


■ MODEL : SK-SO / SK-LO

SK-O

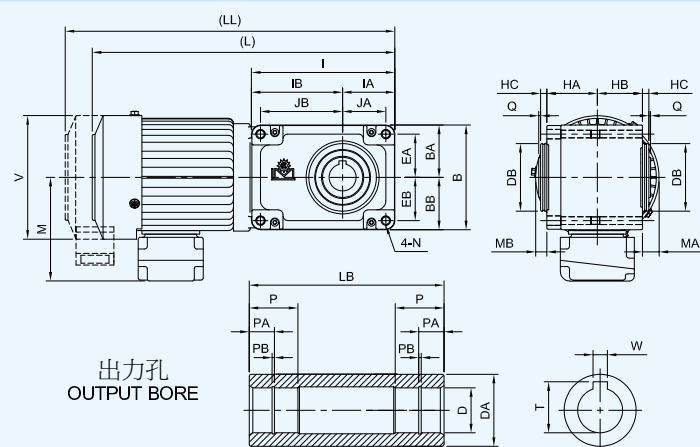

馬力 Horse Power	型號 Model	減速比 Ratio	JA	JB	I	IA	IB	EA	EB	B	BA	BB
1/8HP (0.1kW)	09	1/5~1/100(1/120)	38.5	68.5	127	48.5	78.5	38.5	38.5	97	48.5	48.5
	10-S	1/5~1/40	43.5	76.5	139.5	53.5	86	43.5	43.5	107	53.5	53.5
	10-L	1/50~1/200(1/240)	43.5	96.5	158.5	53.5	105	43.5	43.5	107	53.5	53.5
	09	1/5~1/50(1/60~1/120)	38.5	68.5	127	48.5	78.5	38.5	38.5	97	48.5	48.5
1/4HP (0.2kW)	10-S	1/5~1/40	43.5	76.5	139.5	53.5	86	43.5	43.5	107	53.5	53.5
	10-L	1/50~1/200(1/120~1/240)	43.5	96.5	158.5	53.5	105	43.5	43.5	107	53.5	53.5
	11-S	1/5~1/40	48	91	159	58	101	48	48	116	58	58
	11-L	1/45~1/200(1/220~1/260)	46	110	180	58	122	46	46	116	58	58
1/2HP (0.4kW)	11-S	1/5~1/40	48	91	159	58	101	48	48	116	58	58
	11-L	1/45~1/100(1/120~1/260)	46	110	180	58	122	46	46	116	58	58
	12-S	1/5~1/50	56	105	185	68	117	56	56	136	68	68
	12-L	1/60~1/200(1/225~1/250)	54	140	222	68	154	54	54	136	68	68
1HP (0.75kW)	12-S	1/5~1/50	56	105	185	68	117	56	56	136	68	68
	12-L	1/60~1/100(1/120~1/250)	54	140	222	68	154	54	54	136	68	68
	13-S	1/5~1/40	73	134	235	87	148	73	73	174	87	87
	13-L	1/50~1/200(1/240~1/260)	69	167	272	87	185	69	69	174	87	87
2HP (1.5kW)	13-S	1/5~1/40	73	134	235	87	148	73	73	174	87	87
	13-L	1/50~1/100(1/125~1/260)	69	167	272	87	185	69	69	174	87	87
	14-S	1/5~1/50	102	170	304	118	186	90	90	212	106	106
	14-L	1/60~1/160(1/180~1/285)	94	198	336	116	220	108	108	260	130	130
3HP (2.2kW)	14-S	1/5~1/50	102	170	304	118	186	90	90	212	106	106
	14-L	1/60~1/120(1/160~1/285)	94	198	336	116	220	108	108	260	130	130

unit: mm

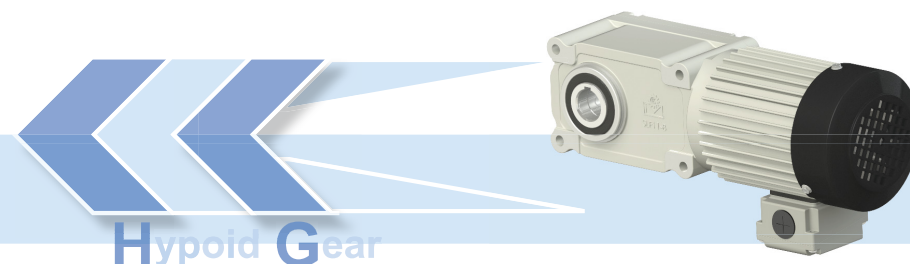

馬力 Horse Power	型號 Model	減速比 Ratio	HA	HB	HC	Q	V	M	L	LL	MA	MB	N
1/8HP (0.1kW)	09	1/5~1/100(1/120)	47	31	7	2	123	108	315	330	30.5	14.5	M10
	10-S	1/5~1/40	50	50	7	2	137	115	325	345	18.5	18.5	M10
	10-L	1/50~1/200(1/240)	50	50	7	2	137	115	340	360	18.5	18.5	M10
	09	1/5~1/50(1/60~1/120)	47	31	7	2	123	108	330	340	30.5	14.5	M10
1/4HP (0.2kW)	10-S	1/5~1/40	50	50	7	2	137	115	345	365	18.5	18.5	M10
	10-L	1/50~1/100(1/120~1/240)	50	50	7	2	137	115	360	380	18.5	18.5	M10
	11-S	1/5~1/40	56	50	7	2	137	115	360	380	18.5	12.5	M10
	11-L	1/45~1/200(1/220~1/260)	56	50	7	2	137	115	380	400	18.5	12.5	M12
1/2HP (0.4kW)	11-S	1/5~1/40	56	50	7	2	137	115	375	395	18.5	12.5	M10
	11-L	1/45~1/100(1/120~1/260)	56	50	7	2	137	115	395	415	18.5	12.5	M12
	12-S	1/5~1/50	67.5	56.5	7	2	151	121	395	400	19	8	M12
	12-L	1/60~1/200(1/225~1/250)	67.5	56.5	7	2	151	121	435	440	19	8	M16
1HP (0.75kW)	12-S	1/5~1/50	67.5	56.5	7	2	151	121	420	425	19	8	M12
	12-L	1/60~1/100(1/120~1/250)	67.5	56.5	7	2	151	121	460	465	19	8	M16
	13-S	1/5~1/40	85	65	7	2	163	131	460	470	16.5	-	M16
	13-L	1/50~1/200(1/240~1/260)	85	65	7	2	163	131	500	510	16.5	-	M16
2HP (1.5kW)	13-S	1/5~1/40	85	65	7	2	163	131	480	490	16.5	-	M16
	13-L	1/50~1/100(1/125~1/260)	85	65	7	2	163	131	520	530	16.5	-	M16
	14-S	1/5~1/50	92.5	92.5	8	2	181	138	570	580	-	-	M16
	14-L	1/60~1/160(1/180~1/285)	92.5	92.5	8	2	181	138	605	620	-	-	M20
3HP (2.2kW)	14-S	1/5~1/50	92.5	92.5	8	2	181	138	610	630	-	-	M16
	14-L	1/60~1/120(1/160~1/285)	92.5	92.5	8	2	181	138	645	660	-	-	M20

unit: mm

馬力 Horse Power	型號 Model	減速比 Ratio	出力孔 Output Bore									重量 Weight (KG)	unit: mm
			D	DA	DB	W	T	P	PA	PB	LB		
1/8HP (0.1kW)	09	1/5~1/100(1/120)	20	30	53	6	22.8	25	13	1.15	96	8	
	10-S	1/5~1/40	25	40	66	8	28.3	30	14	1.35	118	9	
	10-L	1/50~1/200(1/240)	25	40	66	8	28.3	30	14	1.35	118	10	
1/4HP (0.2kW)	09	1/5~1/50(1/60~1/120)	20	30	53	6	22.8	25	13	1.15	96	9	
	10-S	1/5~1/40	25	40	66	8	28.3	30	14	1.35	118	10	
	10-L	1/50~1/100(1/120~1/240)	25	40	66	8	28.3	30	14	1.35	118	11	
	11-S	1/5~1/40	30	45	75	8	33.3	35	17	1.35	124	12	
	11-L	1/45~1/200(1/220~1/260)	30	45	75	8	33.3	35	17	1.35	124	13	
1/2HP (0.4kW)	11-S	1/5~1/40	30	45	75	8	33.3	35	17	1.35	124	14	
	11-L	1/45~1/100(1/120~1/260)	30	45	75	8	33.3	35	17	1.35	124	15	
	12-S	1/5~1/50	35	50	85	10	38.3	40	20	1.75	142	17	
	12-L	1/60~1/200(1/225~1/250)	35	50	85	10	38.3	40	20	1.75	142	18	
	12-S	1/5~1/50	35	50	85	10	38.3	40	20	1.75	142	19	
1HP (0.75kW)	12-L	1/60~1/100(1/120~1/250)	35	50	85	10	38.3	40	20	1.75	142	20	
	13-S	1/5~1/40	45	65	100	14	48.8	50	26	1.95	168	27	
	13-L	1/50~1/200(1/240~1/260)	45	65	100	14	48.8	50	26	1.95	168	30	
2HP (1.5kW)	13-S	1/5~1/40	45	65	100	14	48.8	50	26	1.95	168	30	
	13-L	1/50~1/100(1/125~1/260)	45	65	100	14	48.8	50	26	1.95	168	32	
	14-S	1/5~1/50	55	80	120	16	59.3	60	32	2.2	205	49	
3HP (2.2kW)	14-L	1/60~1/160(1/180~1/285)	55	80	120	16	59.3	60	32	2.2	205	56	
	14-S	1/5~1/50	55	80	120	16	59.3	60	32	2.2	205	53	
	14-L	1/60~1/120(1/160~1/285)	55	80	120	16	59.3	60	32	2.2	205	61	

注:

- 表中 () 內數字表示輕載使用。
- 表中重量以配合三相 4P 馬達為主，其它單相、兩相、交流、特殊馬達重量另訂。
- 表中 L 內數字以三相馬達為主，其它特殊馬達另訂。
- 如需特殊馬達規格，請洽本公司業務。
- 以上數值若有變更，恕不另行通知。

NOTE:

- Values shown in parenthesis () are used for light loading.
- Weights shown in the above chart are based on 3-phase 4P motors, weights for single phase, brake, DC, or special motor shall be referred to specific values.
- Values shown in 'L' column are based on 3-phase motor, other special motor Refer to specific motor refer to specific values.
- For special motor specifications, please contact our business.
- Above specifications are subject to change without prior notice.