■ 臥式戟齒減速機
Horizontal Type Hypoid Gear Reducer

■ MODEL：SLH

SLH

台灣專利字號：M480208
Patent Number(Taiwan)

中國專利字號：201420161664.1
Patent Number(China)

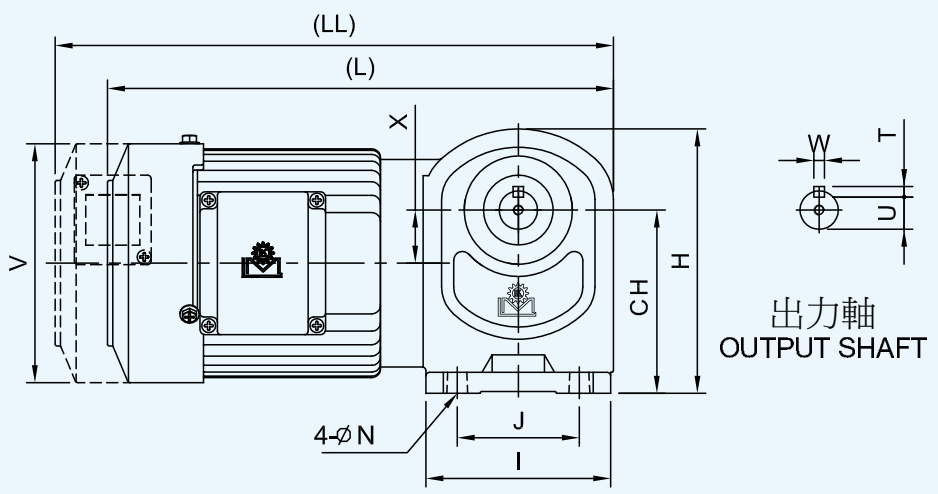

出力軸螺絲孔 Output Shaft Screw Hole	
型號 Model	螺絲規格 Screw Specifications
09	M6
10	M6
11	M8
12	M10
13	M12
14	M16

注：SL 系列通用。
NOTE: Common for SL series.



左軸
LEFT SHAFT



右軸
RIGHT SHAFT



雙軸
DOUBLE SHAFT

型號 Model	螺絲規格 Screw Specifications
09	M8
10	M8
11	M8
12	M10
13	M12
14	M16

注：此表為尺寸 (N) 使用螺絲規格。
NOTE: This table is the size (N) using screw specifications.

unit: mm

馬力 Horse Power	型號 Model	減速比 Ratio	A	AA	J	I	E	B	CH	H	Y	X	N	V	M
60W	09	1/5~1/230(1/250~1/290)	36	81	60	96	90	110	90	138	10	31	9	98	101
90W	09	1/5~1/120(1/155~1/290)	36	81	60	96	90	110	90	138	10	31	9	98	101
1/8HP (0.1kW)	10	1/5~1/200(1/230~1/260)	45	90	70	106	90	116	105	152	12	30	11	137	115
1/4HP (0.2kW)	10	1/5~1/100(1/120~1/260)	45	90	70	106	90	116	105	152	12	30	11	137	115
	11	1/5~1/200(1/225~1/250)	50	100	80	127	100	126	120	177	15	41	11	137	115
1/2HP (0.4kW)	11	1/5~1/100(1/120~1/250)	50	100	80	127	100	126	120	177	15	41	11	137	115
	12	1/5~1/200(1/225~1/250)	60	120	95	154	120	150	140	208	18	47	13	163	131
1HP (0.75kW)	12	1/5~1/100(1/120~1/250)	60	120	95	154	120	150	140	208	18	47	13	163	131
	13	1/5~1/200(1/240)	70	140	120	180	140	180	165	251	20	59	15	181	142
2HP (1.5kW)	13	1/5~1/100(1/125~1/240)	70	140	120	180	140	180	165	251	20	59	15	181	142
	14	1/5~1/160(1/185~1/250)	75	165	150	210	180	230	200	310	25	68	18	181	142
3HP (2.2kW)	14	1/5~1/120(1/160~1/250)	75	165	150	210	180	230	200	310	25	68	18	181	142

unit: mm

馬力 Horse Power	型號 Model	減速比 Ratio	MA	L	LL	LA	LB	LC	出力軸 Output Shaft					重量 Weight (KG)
									D	S	W	T	U	
60W	09	1/5~1/230(1/250~1/290)	49	275	290	182	150	182	18	30	6	6	14.5	7
90W	09	1/5~1/120(1/155~1/290)	49	290	305	182	150	182	18	30	6	6	14.5	7
1/8HP (0.1kW)	10	1/5~1/200(1/230~1/260)	69	295	315	205	184	205	22	40	6	6	18.5	9
1/4HP (0.2kW)	10	1/5~1/100(1/120~1/260)	69	315	335	205	184	205	22	40	6	6	18.5	10
	11	1/5~1/200(1/225~1/250)	69	330	350	215	184	215	28	45	8	7	24	12
1/2HP (0.4kW)	11	1/5~1/100(1/120~1/250)	69	345	365	215	184	215	28	45	8	7	24	14
	12	1/5~1/200(1/225~1/250)	82	345	360	251	213	251	32	55	10	8	27	17
1HP (0.75kW)	12	1/5~1/100(1/120~1/250)	82	380	395	251	213	251	32	55	10	8	27	20
	13	1/5~1/200(1/240)	91	420	440	282	233	282	40	65	12	8	35	29
2HP (1.5kW)	13	1/5~1/100(1/125~1/240)	91	450	470	282	233	282	40	65	12	8	35	34
	14	1/5~1/160(1/185~1/250)	91	490	510	307	256	330	50	75	14	9	44.5	47
3HP (2.2kW)	14	1/5~1/120(1/160~1/250)	91	530	550	307	256	330	50	75	14	9	44.5	51

注：
1. 表中 () 內數字系表示輕荷重使用。
2. 表中重量以配合三相 4P 馬達為主，其它單相、剎車、直流、特殊等馬達重量另訂。
3. 表中 L 內數字以三相馬達為主，其它特殊馬達另訂。
4. 如需特殊馬達規格，請洽本司業務。
5. SLF-O、SLF-D 機種皆適用以上規則。
6. 以上數值若有變更，恕不另行通知。

NOTE：
1.Values shown in paranthesis () are used for light loading.
2.Weights shown in the above chart arebesed on 3-phae 4P motors,weights for single phase, brake, DC, or special motor shall be referred to specific values.
3.Values shown in 'L' column are based on 3-phase motor, other special motor Refer to specific motor refet to specific values.
4.For special motor specifications, please contact our business.
5.The above rules apply to both SLF-O and SLF-D models.
6.Above specifications are subject to change without prior notice.