



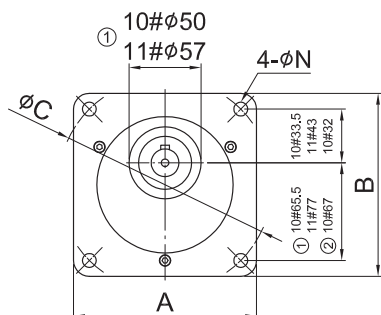


小型齒輪減速機系列

■ 立式馬達自裝式減速機 Vertical Motor-Driver Reducer


■ MODEL : SVB



SVD-A法蘭面





SVB(B法蘭面Flange)
型號Model:11,12,13,14



出力軸
OUTPUT SHAFT

① 型號Model:09,10,11有凸托架(WITH CONVEX TRAILER)

② 型號Model:10無凸托架(WITHOUT CONVEX TRAILER)

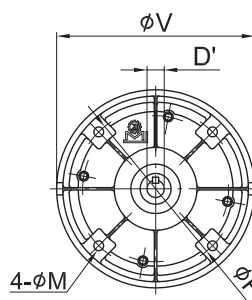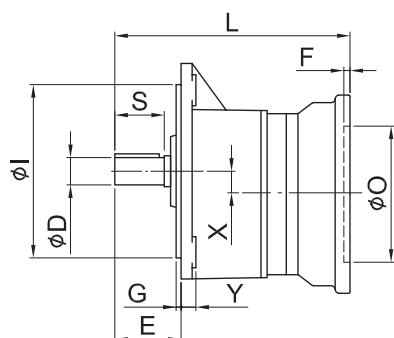

入力孔
INPUT BORE

unit: mm

馬力 Horse Power	型號 Model	減速比 Ratio	A	B	C	N	I	E	G	Y	X	L	F	O	P	M	V	出力軸 Output Shaft					入力孔 Input Brow			重量 Weight (KG)
																		D	S	W	T	U	D'	W'	T'	
1/8HP (0.1kW)	SVB-A10	1/3~1/50 (1/60~1/200)	122	122	140	9	-	33	-	10	17	161	5	110	130	8	160	18	30	5	5	15	11	4	12.8	3
	SVB-B10		158	158	170	9	120	36	3	10	17	161	5	110	130	8	160	18	30	5	5	15	11	4	12.8	3
	SVB-A11	1/6~1/200	145	145	170	11	-	47	4	12	17	187	5	110	130	8	160	22	40	7	7	18	11	4	12.8	6
	SVB-11		174	174	185	11	140	49	4	12	17	187	5	110	130	8	160	22	40	7	7	18	11	4	12.8	6
1/4HP (0.2kW)	SVB-A10	1/3~1/30 (1/40~1/155)	122	122	140	9	-	33	-	10	17	161	5	110	130	8	160	18	30	5	5	15	11	4	12.8	3
	SVB-B10		158	158	170	9	120	36	3	10	17	161	5	110	130	8	160	18	30	5	5	15	11	4	12.8	3
	SVB-A11	1/3~1/90 (1/95~1/155)	145	145	170	11	-	47	4	12	17	187	5	110	130	8	160	22	40	7	7	18	11	4	12.8	6
	SVB-11		174	174	185	11	140	49	4	12	17	187	5	110	130	8	160	22	40	7	7	18	11	4	12.8	6
	12	1/35~1/200	217	217	235	11	180	57	6	15	23	207	5	110	130	8	162	28	45	7	7	24	11	4	12.8	7
1/2HP (0.4kW)	SVB-A11	1/3~1/30 (1/35~1/120)	145	145	170	11	-	47	4	12	17	187	5	110	130	8	160	22	40	7	7	18	14	5	16.3	5
	SVB-11		174	174	185	11	140	49	4	12	17	187	5	110	130	8	160	22	40	7	7	18	14	5	16.3	5
	12	1/3~1/90 (1/100~1/200)	217	217	235	11	180	57	6	15	23	207	5	110	130	8	162	28	45	7	7	24	14	5	16.3	7
	13	1/25~1/200	250	250	280	13	220	65	5	17	26	234	5	110	130	8	162	32	55	10	8	27	14	5	16.3	10
1HP (0.75kW)	12	1/3~1/30 (1/40~1/130)	217	217	235	11	180	57	6	15	23	222	5	130	165	10	200	28	45	7	7	24	19	6	21.8	6
	13	1/3~1/90 (1/100~1/165)	250	250	280	13	220	65	5	17	26	249	5	130	165	10	200	32	55	10	8	27	19	6	21.8	10
	14	1/35~1/180 (1/200)	260	276	310	18	230	77	5	20	28	292	5	130	165	10	200	40	65	10	8	35	19	6	21.8	34
2HP (1.5kW)	12	(1/2.5~1/60)	217	217	235	11	180	57	6	15	23	232	5	130	165	10	200	28	45	7	7	24	24	8	27.3	7
	13	1/3~1/25 (1/30~1/130)	250	250	280	13	220	65	5	17	26	259	5	130	165	10	200	32	55	10	8	27	24	8	27.3	10
	14	1/30~1/90 (1/100~1/170)	260	276	310	18	230	77	5	20	28	302	5	130	165	10	200	40	65	10	8	35	24	8	27.3	34