




GEAR REDUCER SERIES

齒輪減速機系列

MODEL : V

立式減速機 Vertical Type Reducer

RATIO: 1/3~1/30 (雙段 2-Stage)

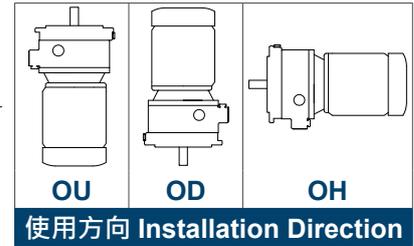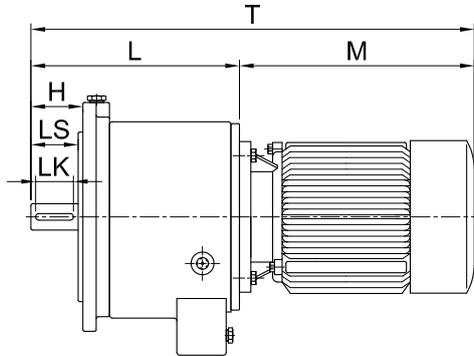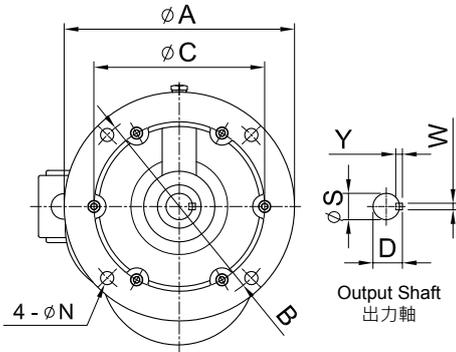

unit: mm

型號 Model	馬力 HP (4P)	減速比 Ratio	M	L	T	H	法蘭面 Flange				出力軸 Output Shaft				重量 Weight (kg)		
							A	B	C	N	D	LS	S	WxYxLK			
201	1/4	3~30	225	146	371	43	186	155	130	10	21	38	19	5x5x30	8		
202	1/2	3~10	248	153	401	50	186	155	130	10	27	45	24	7x7x35	8		
203	1/4	31~50	225	187	412	50	200	175	150	13	27	45	24	7x7x35	12		
	1/2	11~30	248		435												
205	1/2	31~50	248	220	468	55	243	215	180	14	31	50	28	7x7x40	17.5		
	1	3~30	242	211	453												
206	2	3~10	322	216	538	60	243	215	180	14	35	55	32	10x8x45	17.5		
207	1	31~40	242	233	475	60	280	245	210	14	35	55	32	10x8x45	25		
	2	11~30	322		555												
208	3	3~10	315	239	554	65	280	245	210	14	41	60	38	10x8x50	25		
	209	2	31~40		322											271	593
3		11~30	315	261	576												
209S	2	31~40	322	265	587	65	300	265	230	18	41	60	38	10x8x50	34		
	3	11~30	315		254											569	
210	5	3~10	371	266	637	70	330	300	250	18	45	65	42	12x8x55	37		
				210S	259											630	300
211	3	31~40	315	305	620	80	380	335	290	18	51	75	48	12x8x65	56.5		
	5	11~30		371	676												
211S	5	11~30	371	282	653	80	340	300	250	18	51	75	48	12x8x65	48		
212	7 1/2	3~10	374	305	679	80	380	335	290	18	51	75	48	12x8x65	56.5		
	10	3~10	412		717												
213	7 1/2	11~30	374	358	732	85	450	400	350	22	60	80	56	15x10x70	85.5		
	15	3~10	498		856												
213S	7 1/2	11~30	374	356	730	85	440	400	350	22	60	80	56	15x10x70	82		
	15	3~10	498		866											83	
214	10	11~30	412	363	775	90	450	400	350	22	66	85	62	15x10x75	86		
	214S	10		11~30	361											773	440
215	15	11~30	498	434	932	105	500	450	400	24	76.5	100	72	20x12x90	136		
	20	3~10			542											976	
216	20	11~30	542	434	976	105	500	450	400	24	80.5	100	76	20x12x90	137		
	25	5~10			562											996	
217	25	11~30	562	465	1,027	115	590	540	480	24	84.5	110	80	20x12x100	192		
	30	4~30			1,065												
218	40	11~30	600	571	1,171	135	660	610	560	6x24	106.5	130	100	24x16x120	285		
	50	5~10	660	621	1,281												
219 ^{Note 2}	60	5~10				600	653	1,313	156	700	650	600	6x24	124	150	115	32x20x140
	75	5~10	676	1,329													


1. 表中 S 表示新尺寸。"S" means new dimension.

2. V219 外觀及尺寸請參考 B21 頁。Please refer to page B21 for the dimension of V219.

3. 重量不含馬達及潤滑油。The weight does not include motor and lubricant.

MODEL : V

立式減速機 Vertical Type Reducer
RATIO: 1/31~1/200 (三段 3-Stage)

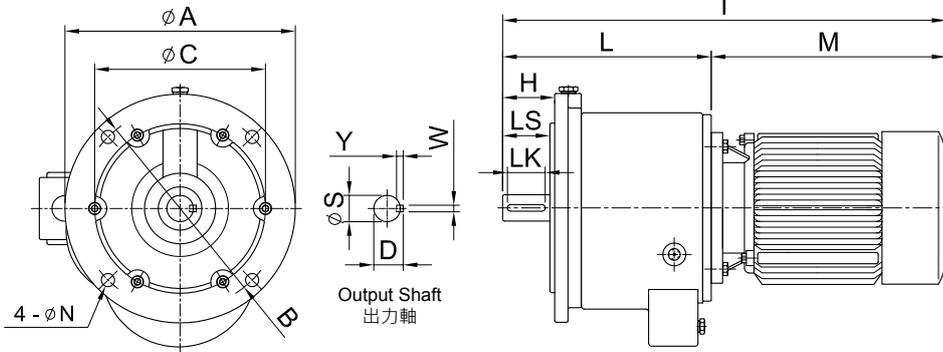

unit: mm

型號 Model	馬力 HP (4P)	減速比 Ratio	M	L	T	H	法蘭面 Flange				出力軸 Output Shaft				重量 Weight (kg)
							A	B	C	N	D	LS	S	WxYxLK	
304	1/4	51~120	225	192	417	55	200	175	150	13	31	50	28	7x7x40	12.5
306	1/4	121~200	225	226	451	60	243	215	180	14	35	55	32	10x8x45	19.5
	1/2	51~120	248		474										
308	1/2	121~200	248	247	495	65	280	245	210	14	41	60	38	10x8x50	26
	1	40~120	242	238	480										
310	2	31~40	322	290	560	70	330	300	250	18	45	65	42	12x8x55	41
	1	121~200	242		532										
	2	51~120	322		612										
310S	1	121~200	242	282	524	80	300	265	230	18	51	75	48	12x8x65	37
	2	60~120	322		604										
312	2	121~200	322	315	648	90	380	335	290	22	66	85	62	15x10x75	63.5
	3	41~120	315		630										
312S	5	31~50	371	307	686	90	340	300	250	22	66	85	62	15x10x75	57
	1	121~200	242		549										
314	2	35~120	322	389	628	105	450	400	350	22	66	85	62	15x10x75	98
	3	121~200	315		704										
314S	5	60~120	371	378	760	90	440	400	350	22	66	85	62	15x10x75	95
	7 1/2	31~50	374		752										
	3	121~200	315		699										
315	5	60~120	371	451	822	105	500	450	400	24	76.5	100	72	20x12x90	158
	7 1/2	121~200	322		828										
	10	31~50	412		866										
316	10	60~120	412	454	866	105	500	450	400	24	80.5	100	76	20x12x90	160
	15	31~50	498		952										
317	7 1/2	121~200	374	496	870	115	590	540	480	24	84.5	110	80	20x12x100	206
	15	40~120	498		978										
318	20	40~50	542	589	1,022	135	660	610	560	6x24	106.5	130	100	24x16x120	326
	10	150~200	412		1,001										
	15	121~200	498		1,087										
	20	60~120	542		1,131										
319 ^{Note 2}	25	60	562	674	1,159	155	700	650	600	6x24	124	150	115	32x20x140	552
	30	40~50	562		1,159										
	20	121~200	542		1,216										
319 ^{Note 2}	25·30	70~90	562	674	1,236	155	700	650	600	6x24	124	150	115	32x20x140	552
	40	40~60	600		1,274										

1. 表中 S 表示新尺寸。"S" means new dimension.

2. V319 外觀及尺寸請參考 B21 頁。Please refer to page B21 for the dimension of V319.

3. 重量不含馬達及潤滑油。The weight does not include motor and lubricant.