
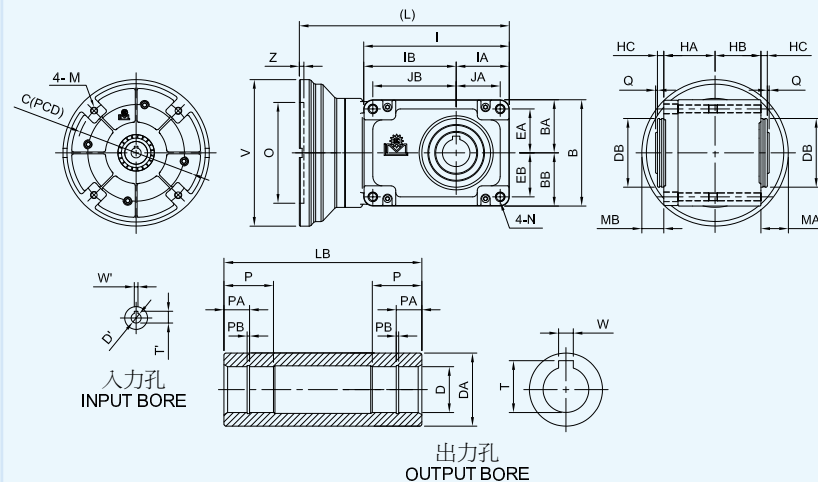


■ 同心軸馬達自裝式載齒減速機
Motor-Driver Hypoid Gear Reducer(Concentric Shaft)

■ MODEL : SKB-SO / SKB-LO

SKB-LO



unit: mm

馬力 Horse Power	V	O	Z	M	C	D'	W'	T'
1/8	160	110	5	M8	130	11	4	12.8
1/4	160	110	5	M8	130	11	4	12.8
1/2	160	110	5	M8	130	14	5	16.3
1	200	130	5	M10	165	19	6	21.8
2	200	130	5	M10	165	24	8	27.3
3	250	180	5	M12	215	28	8	31.3

注：此表適用於 SKB-(S/L)O、SKB-(S/L)D 自裝式機種。
NOTE: This table is suitable for SKB-(S/L)O、SKB-(S/L)D Motor-Driver models.

unit: mm

馬力 Horse Power	型號 Model	減速比 Ratio	JA	JB	I	IA	IB	EA	EB	B	BA
1/8HP (0.1kW)	09	1/5~1/100(1/120)	38.5	68.5	127	48.5	78.5	38.5	38.5	97	48.5
	10-S	1/5~1/40	43.5	76.5	139.5	53.5	86	43.5	43.5	107	53.5
	10-L	1/50~1/200(1/240)	43.5	95.5	158.5	53.5	105	43.5	43.5	107	53.5
1/4HP (0.2kW)	10-S	1/5~1/40	43.5	76.5	139.5	53.5	86	43.5	43.5	107	53.5
	10-L	1/50~1/100(1/120~1/240)	43.5	95.5	158.5	53.5	105	43.5	43.5	107	53.5
	11-S	1/5~1/40	48	91	159	58	101	48	48	116	58
1/2HP (0.4kW)	11-L	1/45~1/200(1/220~1/260)	46	110	180	58	122	46	46	116	58
	11-S	1/5~1/40	48	91	159	58	101	48	48	116	58
	11-L	1/45~1/100(1/120~1/260)	46	110	180	58	122	46	46	116	58
1HP (0.75kW)	12-S	1/5~1/50	56	105	185	68	117	56	56	136	68
	12-L	1/60~1/200(1/225~1/250)	54	140	222	68	154	54	54	136	68
	12-S	1/5~1/50	56	105	185	68	117	56	56	136	68
2HP (1.5kW)	12-L	1/60~1/100(1/120~1/250)	54	140	222	68	154	54	54	136	68
	13-S	1/5~1/40	73	134	235	87	148	73	73	174	87
	13-L	1/50~1/200(1/240~1/260)	69	167	272	87	185	69	69	174	87
3HP (2.2kW)	13-S	1/5~1/40	73	134	235	87	148	73	73	174	87
	13-L	1/50~1/100(1/125~1/260)	69	167	272	87	185	69	69	174	87
	14-S	1/5~1/50	102	170	304	118	186	90	90	212	106
	14-L	1/60~1/160(1/180~1/285)	94	198	336	116	220	108	108	260	130
	14-S	1/5~1/50	102	170	304	118	186	90	90	212	106
	14-L	1/60~1/120(1/160~1/285)	94	198	336	116	220	108	108	260	130

unit: mm

馬力 Horse Power	型號 Model	減速比 Ratio	BB	HA	HB	HC	Q	L	MA	MB	N
1/8HP (0.1kW)	09	1/5~1/100(1/120)	48.5	47	31	7	2	184	49	33	M10
	10-S	1/5~1/40	53.5	50	50	7	2	214	30	30	M10
	10-L	1/50~1/200(1/240)	53.5	50	50	7	2	229	30	30	M10
1/4HP (0.2kW)	10-S	1/5~1/40	53.5	50	50	7	2	214	30	30	M10
	10-L	1/50~1/100(1/120~1/240)	53.5	50	50	7	2	229	30	30	M10
	11-S	1/5~1/40	58	56	50	7	2	229	30	24	M10
1/2HP (0.4kW)	11-L	1/45~1/200(1/220~1/260)	58	56	50	7	2	250	30	24	M12
	11-S	1/5~1/40	58	56	50	7	2	229	30	24	M10
	11-L	1/45~1/100(1/120~1/260)	58	56	50	7	2	250	30	24	M12
1HP (0.75kW)	12-S	1/5~1/50	68	67.5	56.5	7	2	258	23.5	12.5	M12
	12-L	1/60~1/200(1/225~1/250)	68	67.5	56.5	7	2	297	23.5	12.5	M16
	12-S	1/5~1/50	68	67.5	56.5	7	2	272	43.5	32.5	M12
2HP (1.5kW)	12-L	1/60~1/100(1/120~1/250)	68	67.5	56.5	7	2	311	43.5	32.5	M16
	13-S	1/5~1/40	87	85	65	7	2	321	35	15	M16
	13-L	1/50~1/200(1/240~1/260)	87	85	65	7	2	361	35	15	M16
3HP (2.2kW)	13-S	1/5~1/40	87	85	65	7	2	331	35	15	M16
	13-L	1/50~1/100(1/125~1/260)	87	85	65	7	2	371	35	15	M16
	14-S	1/5~1/50	106	92.5	92.5	8	2	407	7.5	7.5	M16
	14-L	1/60~1/160(1/180~1/285)	130	92.5	92.5	8	2	439	7.5	7.5	M20
	14-S	1/5~1/50	106	92.5	92.5	8	2	416	32.5	32.5	M16
	14-L	1/60~1/120(1/160~1/285)	130	92.5	92.5	8	2	448	32.5	32.5	M20

unit: mm

馬力 Horse Power	型號 Model	減速比 Ratio	出力孔 Output Bore									重量 Weight (KG)
			D	DA	DB	W	T	P	PA	PB	LB	
1/8HP (0.1kW)	09	1/5~1/100(1/120)	20	30	53	6	22.8	25	13	1.15	96	5
	10-S	1/5~1/40	25	40	66	8	28.3	30	14	1.35	118	6
	10-L	1/50~1/200(1/240)	25	40	66	8	28.3	30	14	1.35	118	7
1/4HP (0.2kW)	10-S	1/5~1/40	25	40	66	8	28.3	30	14	1.35	118	6
	10-L	1/50~1/100(1/120~1/240)	25	40	66	8	28.3	30	14	1.35	118	7
	11-S	1/5~1/40	30	45	75	8	33.3	35	17	1.35	124	8
	11-L	1/45~1/200(1/220~1/260)	30	45	75	8	33.3	35	17	1.35	124	9
1/2HP (0.4kW)	11-S	1/5~1/40	30	45	75	8	33.3	35	17	1.35	124	8
	11-L	1/45~1/100(1/120~1/260)	30	45	75	8	33.3	35	17	1.35	124	9
	12-S	1/5~1/50	35	50	85	10	38.3	40	20	1.75	142	11
	12-L	1/60~1/200(1/225~1/250)	35	50	85	10	38.3	40	20	1.75	142	12
1HP (0.75kW)	12-S	1/5~1/50	35	50	85	10	38.3	40	20	1.75	142	12
	12-L	1/60~1/100(1/120~1/250)	35	50	85	10	38.3	40	20	1.75	142	13
	13-S	1/5~1/40	45	65	100	14	48.8	50	26	1.95	168	20
	13-L	1/50~1/200(1/240~1/260)	45	65	100	14	48.8	50	26	1.95	168	22
2HP (1.5kW)	13-S	1/5~1/40	45	65	100	14	48.8	50	26	1.95	168	20
	13-L	1/50~1/100(1/125~1/260)	45	65	100	14	48.8	50	26	1.95	168	23
	14-S	1/5~1/50	55	80	120	16	59.3	60	32	2.2	205	37
	14-L	1/60~1/160(1/180~1/285)	55	80	120	16	59.3	60	32	2.2	205	45
3HP (2.2kW)	14-S	1/5~1/50	55	80	120	16	59.3	60	32	2.2	205	39
	14-L	1/60~1/120(1/160~1/285)	55	80	120	16	59.3	60	32	2.2	205	46